LED LAMPS ARE POLARITY SENSITIVE
IF LED FAILS TO LIGHT REMOVE IT
ROTATE THE LED 180 DEGREES
& REINSERT.

SPST 2 POSITION SW
A(UP) = 1-2
NONE
B(DN) = 3-2

SPST 3 POSITION SW
A(UP) = 1-2
(CTR) = No Connection
B(DN) = 3-2

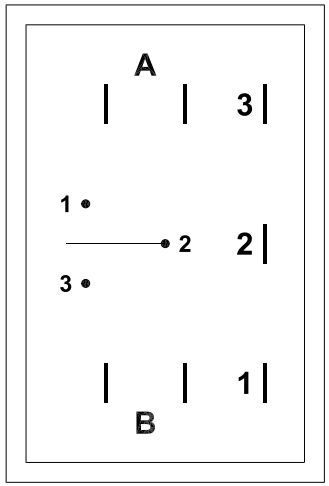

SPST SWITCH

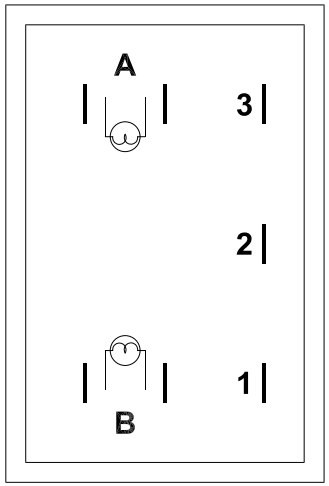

SPST SWITCH

RECOMMENDED
MOUNTING CUTOUT

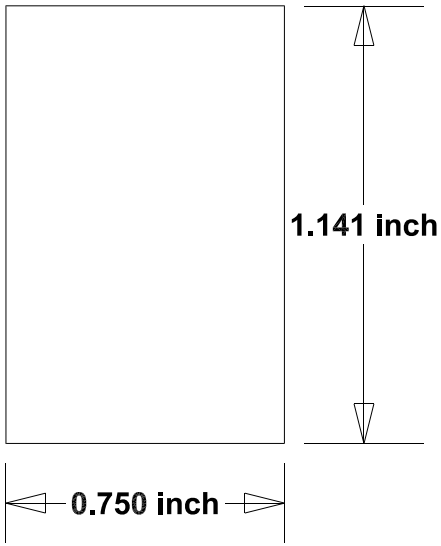

DPDT 2 POSITION SW
A(UP) = 1-2
B(UP) = 4-5
NONE
A(UP) = 3-2
B(DN) = 6-5

DPDT 3 POSITION SW
A(UP) = 1-2
B(UP) = 4-5
(CTR) = 3-2
(CTR) = 4-5
B(DN) = 3-2
B(DN) = 6-5

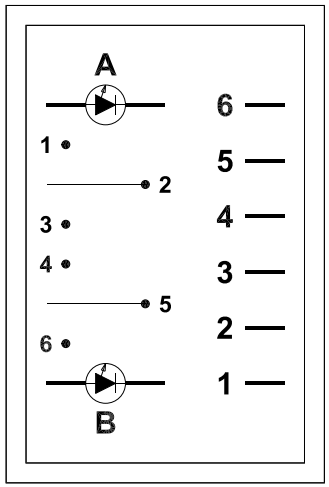

DPDT SWITCH

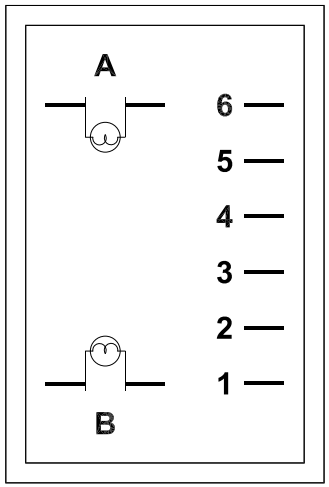

DPDT SWITCH

AML24 Switches are rated for 24vdc at 2 amps.

For circuits needing
more then 2 amps
a Relay must be used.

StainAir Inc			
BUILDER			
TITLE			
DWG NO	**AML24 DRAWING**		
TECHNICIAN			
SIZE A		SHEET **1**	REV **A**