

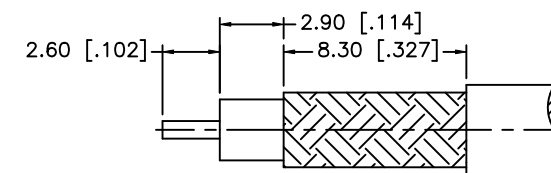
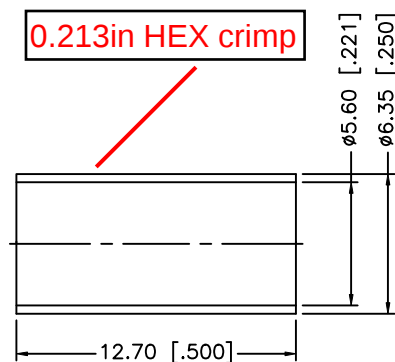


REV.	DATE	ECR NO.	DESCRIPTION
A	04/31/03	—	UPDATE DRAWING FORMAT
B	06/21/05	—	CHANGE 59/U TO 58/U IN PART DESCRIPTION
C	09/10/08	—	CHANGE 58/U TO 55/U IN PART DESCRIPTION

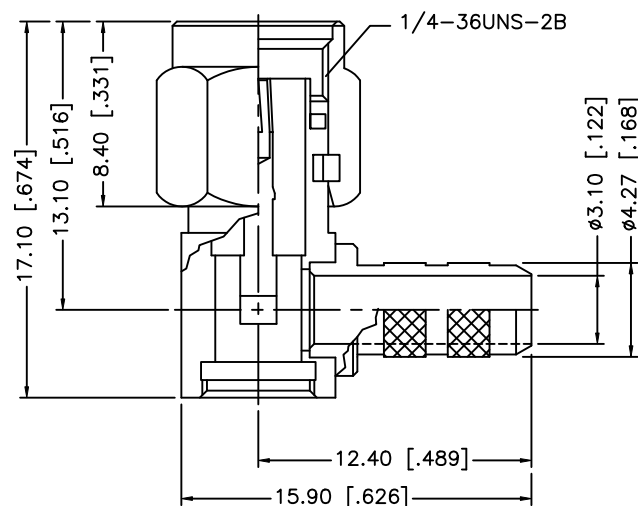

RECOMMENDED
CABLE STRIPPING DIM'S



SA-1004

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .213" [5.41]
2. CONTACT PIN TO SOLDER.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	GRS	09/10/08							
7	FERRULE	COPPER	GOLD	1		CHECKED			PART DESCRIPTION SMA R/A CRIMP PLUG (FOR RG-55/U, 223/U, 142/U, <u>400/U</u> CABLE)						
6	COVER	BRASS	GOLD	1		ISSUED									
5	GASKET	SILICONE	RED	1		SHEET	1 OF 1								
4	RETAINER RING	BER. COPPER	NATURAL	1		CAD FILE		C:/132/132194.DWG		PART NO. 132194					
3	CONTACT PIN	BRASS	GOLD	1						DWG. NO.		132194.DWG	REV. NC	SIZE A	SCALE NA
2	INSULATOR	PTFE	NATURAL	1											
1	BODY/BARREL	BRASS	GOLD	1											
DESCRIPTION					MATERIAL	FINISH	QTY								