

Wedglock Removal Tool for Deutsch Connectors

[SteinAir SKU: SAT-1124](#)

1. USING THE TOOL

1.1. Removing Socket Contacts (Refer to Figure 2)

1. Slide the screwdriver tip of the removal tool under the secondary wedge lock, and by evenly lifting it, remove it from the connector.



CAUTION: Be careful not to damage the outer perimeter seal of the connector.

2. Insert the screwdriver tip of the removal tool into the contact cavity of the contact to be removed to release the locking finger.

3. Holding the rear seal of the connector in place, pull the wire until the contact is removed.

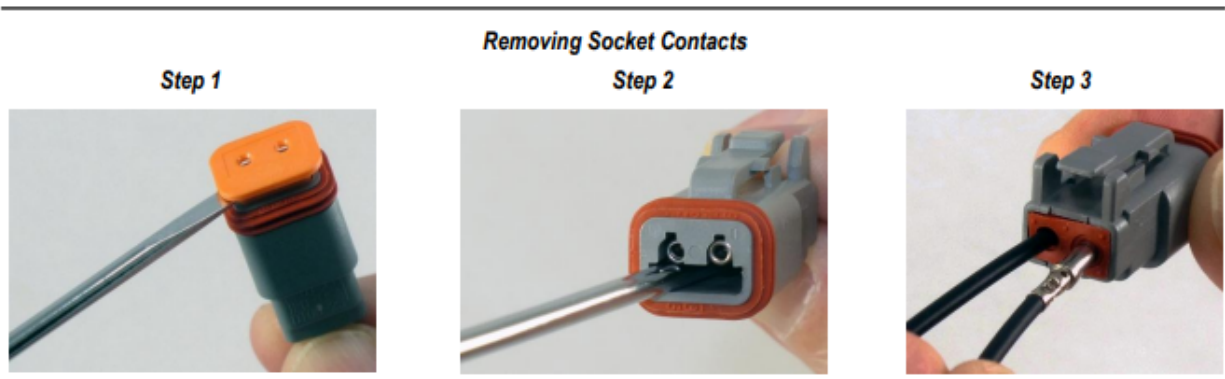


Figure 2

SteinAir

Wedgeloock Removal Tool for Deutsch Connectors

[SteinAir SKU: SAT-1124](#)

1.2. Removing Pin Contacts (Refer to Figure 3)

1. Using the hook tip of the removal tool, grasp the secondary wedge lock, then pull it straight out of the connector.
2. Insert the screwdriver tip of the removal tool into the contact cavity of the contact to be removed to release the locking finger.
3. Holding the rear seal of the connector in place, pull the wire until the contact is removed.

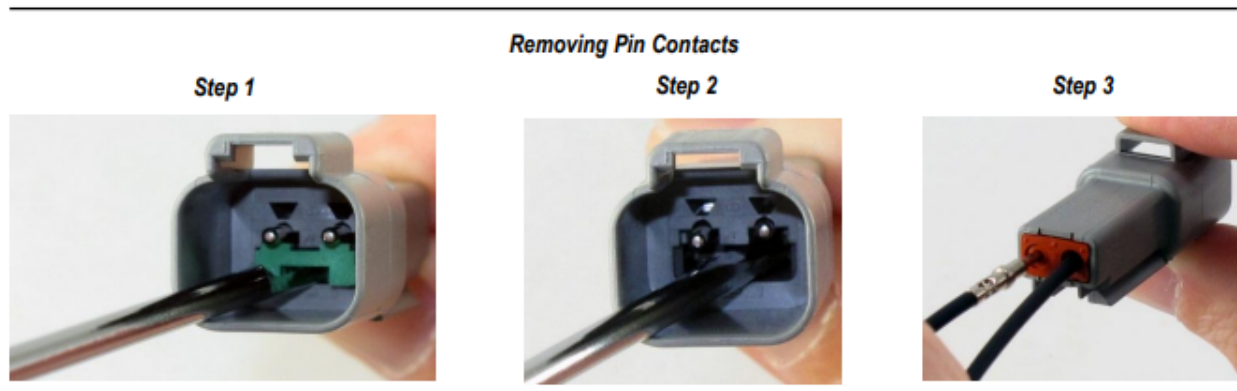


Figure 3

2. TOOL MAINTENANCE

It is recommended that the tool be inspected when received and at regularly scheduled intervals. The tool is not repairable and should be replaced when it is worn or damaged. Store the tool in a clean, dry place and clean the tool with a soft, lint-free cloth.

