


**TOGGLE™ OPERATING INSTRUCTIONS**

**Measuring Gauge Faces**  
 FACE 3 = 3mm from blade  
 FACE 6 = 6mm from blade  
 FACE 9 = 9mm from blade

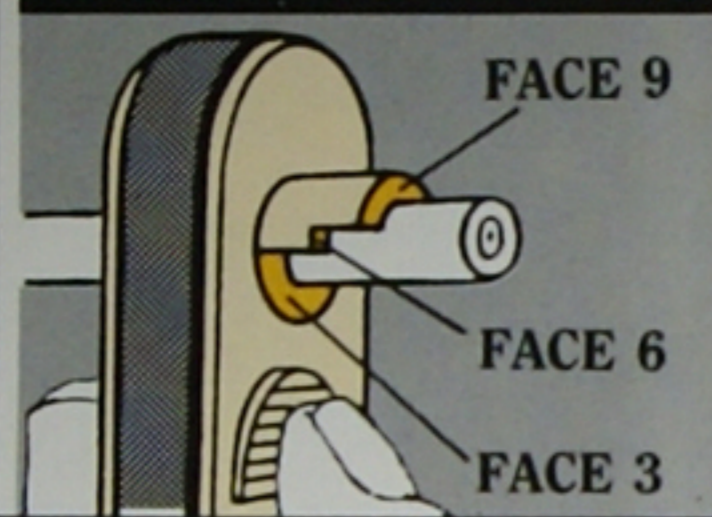

**1** **FOR 2 LEVEL STRIPPING FOLLOW STEPS 1-6**  
 (A) Open tool by pulling ring with middle finger while pushing on sides of tool with thumb and forefinger. This Retracts blade.  
 (B) Insert cable until End is approximately 20mm past FACE 9 on Measuring Gauge. Release blade.

**2** **FOR 1st CUT (LEVEL 1)**  
 (A) Rotate tool overhand (clockwise) minimum of 6 turns until cutting stops.  
 (B) Then underhand (counter-clockwise) 2 turns.

**3** **EXPOSING CENTRE CONDUCTOR**  
 Twist cable End (use pliers on tough cables) and remove scrap. Centre conductor can be trimmed after strip is completed.

**4** **GAUGING BRAID LENGTH**  
 (A) Retract blade. (B) Push cable through until the 1st CUT is appropriate distance from blade. Use Measuring Gauge to Set length of BRAID required.

**5** **FOR 2nd CUT (LEVEL 2)**  
 Rotate tool underhand (counter-clockwise) minimum of 6 turns. For small strip lengths see STEADIER CUTTING.

**6** **PULLING OFF SCRAP PARTS**  
 Hold tool firmly on cable, then pull-off tool to remove scrap parts.  
 The 2 level strip is now complete.

**FOR 3 LEVEL STRIPPING**

**FOLLOW STEPS 1 2 3 THEN SKIP TO 7 THROUGH 10**

**7** **GAUGING DIELECTRIC LENGTH**  
 (A) Retract blade. (B) Push cable through until the 1st CUT is appropriate distance from blade. Use Measuring Gauge to Set length of DIELECTRIC required.

**8** **FOR 2nd CUT (LEVEL 2)**  
 (A) Rotate tool overhand (Clockwise) minimum of 6 turns until cutting stops. (B) Then underhand (counter-clockwise) 2 turns. If tool has tendency to "walk" off cable see STEADIER CUTTING.

**9** **STEADIER CUTTING**  
 For small strip lengths push "Toggle" up against thumb and index finger while rotating tool with half-turns.

**10** **GAUGING BRAID LENGTH**  
 (A) Retract blade. (B) Push cable through until 2nd CUT is appropriate distance from blade. Use Measuring Gauge to Set length of BRAID required.

**FOR 3rd CUT (LEVEL 3)**  
 Rotate tool underhand (counter-clockwise) minimum of 6 turns. Then pull off tool to remove scrap parts as in step 6. 3 level strip is now complete.